




EMA3 Test Point with threaded connection M 16x2

Series 3

Male thread: BSP, metric

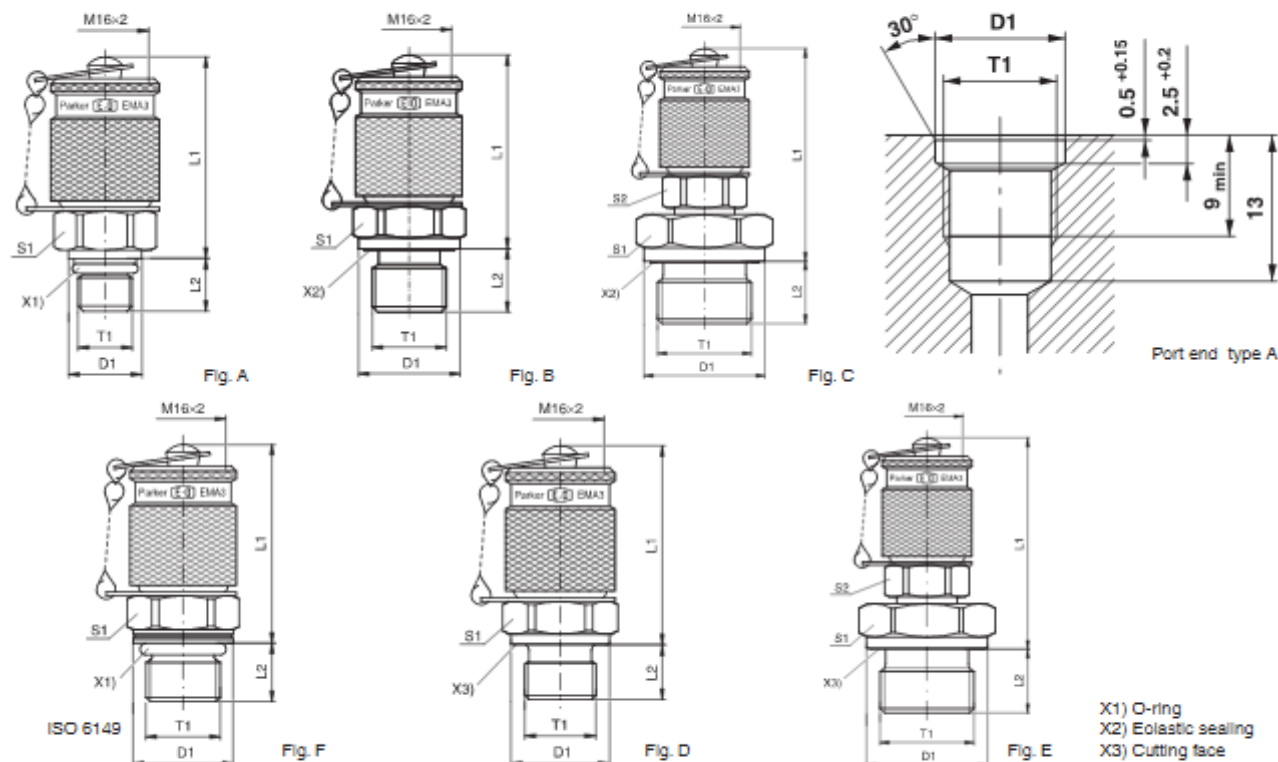

T1	D1	L1	L2	S1	S2	Fig.	Weight g/1 piece	Order code*	PN (bar) ¹⁾ CF 71	DF** CF 71
M 08x1.0	9.5	38.5	7.5	17		A	66	EMA3/8X10R	250	4.0
M 10x1.0	11.5	37.0	7.5	17		A	70	EMA3/10X10R	630	4.0
M 14x1.5	18.8	39.5	11.0	19		F	79	EMA3/14X1.5ISO	630 630	4.0 4
M 10x1.0	14.0	40.0	8.0	17		D	67	EMA3/10X1	400	4.0
M 12x1.5	17.0	38.0	12.0	17		D	74	EMA3/12X1.5	400	4.0
M 14x1.5	19.0	39.0	12.0	19		D	78	EMA3/14X1.5	400	4.0
M 16x1.5	21.0	40.0	12.0	22		D	90	EMA3/16X1.5	400	4.0
G 1/8	14.0	37.5	8.0	17		D	70	EMA3/1/8	400	4.0
G 1/4	18.0	39.0	12.0	19		D	77	EMA3/1/4	400	4.0
G 3/8	22.0	40.5	12.0	22		D	91	EMA3/3/8	400	4.0
G 1/2	26.0	46.0	14.0	27	17	E	137	EMA3/1/2	400	3.4
G 1/8	14.0	37.5	8.0	17		B	72	EMA3/1/8ED	400 400	4.0 4
G 1/4	19.0	39.0	12.0	19		B	76	EMA3/1/4ED	630 630	4.0 4
G 3/8	22.0	40.5	12.0	22		B	93	EMA3/3/8ED	630 630	4.0 4
M 10x1.0	14.0	40.0	8.0	17		B	71	EMA3/10X1ED	400 400	4.0 4
M 12x1.5	17.0	38.0	12.0	17		B	72	EMA3/12X1.5ED	630 630	4.0 4
M 14x1.5	19.0	39.0	12.0	19		B	77	EMA3/14X1.5ED	400 400	4.0 4
G 1/2	27.0	46.0	14.0	27	17	C	135	EMA3/1/2ED	400 400	4.0 4

**DF = Design Factor

¹⁾ Pressure shown - item deliverable

PN (bar) - PN (MPa)
10

*Please add the suffixes
below according to the material/
surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	EMA3/10X10ORCF	NBR
Stainless Steel	71	EMA3/10X10OR71	VIT