



METAALUNIE

Trade & Metal Services v.o.f.

Kreeft 4
4401 NZ Yerseke (Nederland)
Postbus 16
4400 AA Yerseke (Nederland)
Tel.: +31 (0)113-57 38 78
Fax: +31 (0)113-57 39 78
Internet: www.metalservices.nl
E-mail: info@metalservices.nl

TERMINALE A SNODO RILUBRIFICABILE BALL-JOINT END WITH GREASE NIPPLE NACHSCHMIEGBARER GELENKKOPF

TS...C

Codice Code Bestell-Nr.	d	S	I	d1	S1	L	d4	PC (Ton)	lg
^ CST5010C00	10	9	24	29	7	38,5	3	0,82	0,04
^ CST5012C00	12	10	27	34	8	44	3	1,08	0,06
^^ CST5015C00	15	12	31	40	10	51	4	1,70	0,12
CST5016C00	16	14	35	46	11	58	4	1,90	0,17
^^ CST5017C00	17	14	35	46	11	58	4	2,12	0,18
CST5020C00	20	16	38	53	13	64,5	4	3,00	0,26
CST5025C00	25	20	45	64	17	77	4	4,80	0,45
CST5030C00	30	22	51	73	19	87,5	4	6,20	0,67
CST5035C00	35	25	61	82	21	102	4	8,00	1,02
CST5040C00	40	28	69	92	23	115	4	10,00	1,40
CST5045C00	45	32	77	102	27	128	6	12,70	1,93
CST5050C00	50	35	88	112	30	144	6	15,60	2,69
CST5060C00	60	44	100	135	38	167,5	6	24,50	4,60
CST5070C00	70	49	115	160	42	195	6	31,50	7,00
CST5080C00	80	55	141	180	47	231	6	40,00	11,00


Norme DIN 648, SERIE E, TIPO C Materiale - Material: ACCIAIO - STEEL - STAHL ST 52.3

PC = Carico dinamico max. ammesso - Max Dynamic load - Max Dynamisch last - (TON)

* NON RILUBRIFICABILE - WITHOUT GREASE NIPPLE - NICHT NACHSCHMIEGBAR

** RILUBRIFICABILE MEDIANTE FORO - LUBRICATING HOLE IN THE HEAD -

- DURCH BOHRUNG NACHSCHMIEGBAR

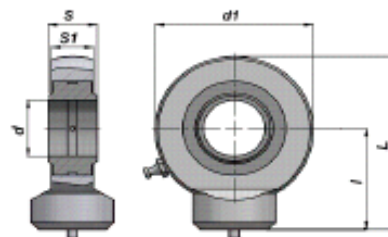

TSC-LSTING 12-05

Errore disconnessione

TERMINALE A SNODO RILUBRIFICABILE BALL-JOINT END WITH GREASE NIPPLE NACHSCHMIEGBARER GELENKKOPF

TS...N


Codice Code Bestell-Nr.	d	S	I	d1	S1	L	PC (Ton)	lg
^^ CST5016N00	16	14	35	48	17,5	59,0	2,12	0,29
CST5020N00	20	16	38	50	19	63	3,00	0,35
CST5025N00	25	20	45	55	23	72,5	4,80	0,53
CST5030N00	30	22	51	65	25	83,5	6,20	0,85
CST5035N00	35	25	61	83	30	102,5	8,00	1,50
CST5040N00	40	28	69	100	35	119	10,00	2,48
CST5045N00	45	32	77	110	40	132	12,70	3,45
CST5050N00	50	35	88	123	40	149,5	15,60	4,45
CST5060N00	60	44	100	140	50	170	24,5	7,10
CST5070N00	70	49	115	164	55	197	31,5	10,70
CST5080N00	80	55	141	180	60	231	40,00	15,10

Norme DIN 648, SERIE E, TIPO N Materiale - Material: ACCIAIO - STEEL - STAHL ST 52.3

PC = Carico dinamico max. ammesso - Max Dynamic load - Max Dynamisch last - (TON)

** RILUBRIFICABILE MEDIANTE FORO - LUBRICATING HOLE IN THE HEAD -

- DURCH BOHRUNG NACHSCHMIEGBAR

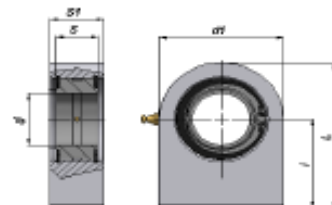

TSC-LSTING 12-05