

## Directional valves → Electrically operated

**Series CD04**  
**Accessories**
**R, P, S subbase, Series CD04**

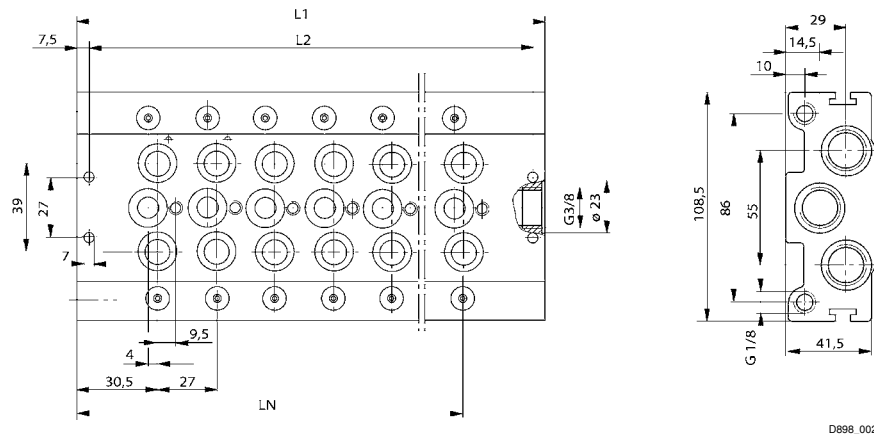

5772-201

Ambient temperature min./max.	-25 °C / +80 °C
Medium temperature min./max.	-25 °C / +80 °C
Medium	Compressed air
Working pressure min./max.	-0.95 bar / 16 bar
Exhaust (3,5)	With directional exhaust (3/5)
	Ports separated
	according to ISO 228-1
Compressed air connection	
Materials:	
Subbase	Aluminum; Polyoxymethylene
Seals	Acrylonitrile Butadiene Rubber

**Technical Remarks**

- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of air pressure must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.

Compressed air connection			Number of valve positions	Weight	Part No.
Input	Exhaust	Pilot connection			
[1]	[3 / 5]	[14]		[kg]	
G 3/8	G 3/8	G 1/8	4	1.3	<b>8985070042</b>
			6	1.8	<b>8985070062</b>
			8	2.3	<b>8985070082</b>
			10	2.7	<b>8985070102</b>
			12	3.2	<b>8985070122</b>

**Dimensions**


D898\_002

Part No.	L1	L2	LN								
<b>8985070042</b>	142	127	112								
<b>8985070062</b>	196	181	166								
<b>8985070082</b>	250	235	200								

Directional valves → Electrically operated

Series CD04  
Accessories

Part No.	L1	L2	LN									
<b>8985070102</b>	304	289	274									
8985070122	358	343	328									