

Directional valves → Electrically operated

Series CD07
Accessories
R, P, S subbase, Series CD07


5772-201

Ambient temperature min./max.	-25 °C / +80 °C
Medium temperature min./max.	-25 °C / +80 °C
Medium	Compressed air
Working pressure min./max.	-0.95 bar / 16 bar
Exhaust (3,5)	With directional exhaust (3/5)
	Ports separated
Compressed air connection	according to ISO 228-1
Materials:	
Subbase	Aluminum; Polyoxymethylene
Seals	Acrylonitrile Butadiene Rubber

Technical Remarks


- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of air pressure must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.

Compressed air connection			Number of valve positions	Weight	Part No.
Input	Exhaust	Pilot connection			
[1]	[3 / 5]	[X]		[kg]	
G 1/2	G 1/2	G 1/8	4	1.446	8985072042
			6	1.94	8985072062
			8	2.422	8985072082
			10	2.943	8985072102
			12	3.401	8985072122

Directional valves → Electrically operated

Series CD07
Accessories

Dimensions

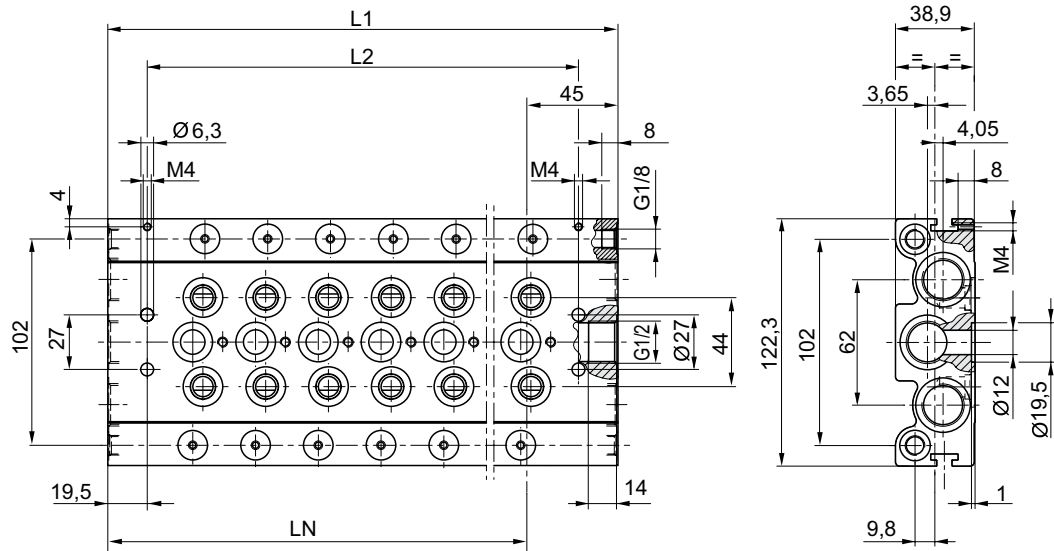

00138184

Part No.	L1	L2	LN									
8985072042	183	144	138									
8985072062	245	206	200									
8985072082	307	268	262									
8985072102	369	330	324									
8985072122	431	392	386									