




DIN 8188 Ketting Duplex(ASA)

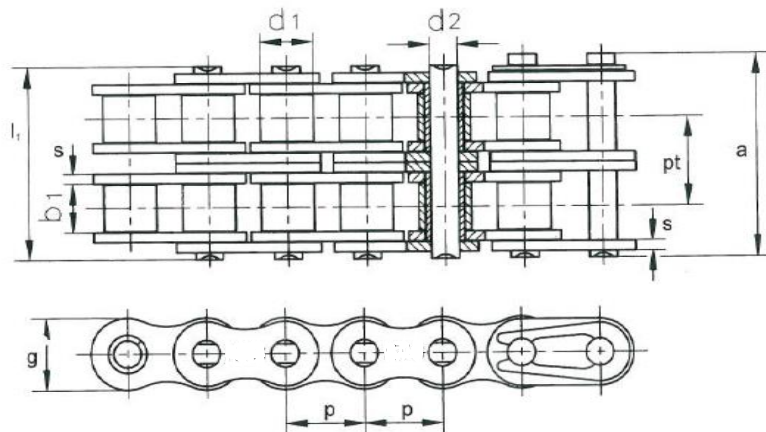

Ketten-Nr.	ANSI Nr.	Teilung p mm	lichte Weite Innenglied b1 mm min.	Rollen-durchm. d1 mm max.	Bolzen-durchm. d2 mm max.	Laschen-höhe g mm max.	Laschen-dicke s mm max.	Bolzen-länge l1 mm max.	a mm max.	Quer-teilung pt mm	Bruchkraft standard FB kN min.	Bruchkraft Ø erreicht kN	Gewicht q kg/m ca.
K *04C-2	*25-2	6,350	3,18	3,30	2,31	6,0	0,8	14,5	15,0	6,40	7,00	8,60	0,28
K *06C-2	*35-2	9,525	4,77	5,08	3,58	9,0	1,3	22,5	23,3	10,13	15,80	19,70	0,63
K 085-2	41-2	12,700	6,25	7,77	3,58	9,9	1,3	25,7	26,9	11,95	13,34	16,90	0,81
K 08A-2	40-2	12,700	7,85	7,95	3,96	12,0	1,5	31,0	32,2	14,38	28,20	35,90	1,12
K 10A-2	50-2	15,875	9,40	10,16	5,08	15,1	2,0	38,9	40,4	18,11	44,40	58,10	2,00
K 12A-2	60-2	19,050	12,57	11,91	5,94	18,0	2,4	48,8	50,5	22,78	63,60	82,10	2,92
K 16A-2	80-2	25,400	15,75	15,88	7,92	24,0	3,3	62,7	64,3	29,29	113,40	141,80	5,15
K 20A-2	100-2	31,750	18,90	19,05	9,53	30,0	4,0	76,4	80,5	35,73	177,00	219,40	7,80
K 24A-2	120-2	38,100	25,22	22,23	11,10	35,7	4,8	95,8	99,7	45,44	254,00	314,90	11,70
K 28A-2	140-2	44,450	25,22	25,40	12,70	41,0	5,6	103,3	107,9	48,87	344,80	427,50	15,14
K 32A-2	160-2	50,800	31,55	28,58	14,27	47,8	6,4	123,3	128,1	58,55	453,60	562,40	20,14
K 36A-2	180-2	57,150	35,48	35,71	17,46	53,6	7,2	138,6	144,4	65,84	560,50	695,00	29,22
K 40A-2	200-2	63,500	37,85	39,68	19,85	60,0	8,0	151,9	158,8	71,55	707,60	877,40	32,24
K 48A-2	240-2	76,200	47,35	47,63	23,81	72,4	9,5	183,4	190,8	87,83	1.020,60	1.255,30	45,23

a) Bolzenlänge Verschlussglied, * Hülseketten ohne Rollen